



Thermal Transfer Ribbons

US660

Wax
Resin

Near Edge,
TTO

US660 is a “Near Edge/Corner Edge” wax/resin ribbon, specifically designed for use within the food packaging industry. This ribbon has a good scratch and smear resistance with a thinner film, which makes product size compact.

RIBBON SPECIFICATION

RIBBON

GRADE : WAX/RESIN, NEAR-EDGE/TTO
COLOUR : BLACK
THICKNESS : 6.0±0.5 µm
Anti-static formulation ink
BASE FILM : POLYESTER (4.5±0.3 µm)
BACK COAT : SILICONE BASED
INK MELTING POINT : 65 °C

STORAGE AND USE

STORAGE : 0-40 °C (32-104 °F), 20-80 %RH
USE : 5-35 °C (41-95 °F) , 20-80 %RH

RECOMMENDED LABEL STOCK

PET, PP, Nylon

CERTIFICATIONS

HEAVY METALS : 2011/65/EU, (EU)2015/863 (RoHS, RoHS2.0)
REACH : SVHC free
HALOGEN-FREE : IEC 61249-2-21
ISEGA CERTIFIED : Regulation (EC) no.1935/2004
FDA, BPA

*Above documents are available upon request.


APPLICATION




FLEXIBLE PACKING

RIBBON PERFORMANCE


IMAGE DENSITY (KONICA MINOLTA FD-5)



SCRATCH /SMUDGE RESISTANCE (ANSI)

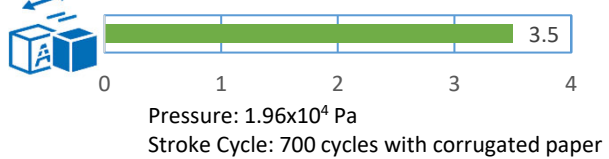

PRINT SPEED (mm/sec)



UV RESISTANCE (%)



TRANSFER SENSITIVITY



SOLVENT RESISTANCE



* The numerical value indicated on this sheet is catalog value, and is not guarantee value.

* The information shown above is tentative and subject to change without notice.



UNION CHEMICAR Global Network

Japan : Union Chemicar Co., Ltd.

China (Shanghai) : Union Chemicar (Shanghai) Co., Ltd.

China (Tianjin) : Union Chemicar (Tianjin) Co., Ltd.

United States : Union Chemicar America Inc.

United Kingdom : Union Chemicar UK Limited

Netherlands : Union Chemicar Europe B.V.

Germany : Union Chemicar Deutschland GmbH

India : Union Chemicar India Pvt. Ltd.



[30 Aug. 2023]